




- Fully autonomous Mobile Service Station
- Commissioned in 2 hours
- Built to European safety standards
- Made to order and customizable

| Ref. | Description |
|----------|--|
| SM002015 | Basic Container Diesel Service Station 20' with 18.500L tank and 40L/min Dispenser |
| SM002040 | Basic Container Diesel Service Station 40' with 44.000L tank and 40L/min Dispenser |
| SG000010 | Gasoline Equipment (ATEX Electric Installation, Grounding and Vapour Recovery Stage I) |
| CDC02200 | Complete Double tank compartment, with double dispenser, piping and valves |
| UP000500 | Unloading pump (500L/min) with valves and piping |
| SSB00080 | Extra charge for 80L/min Dispenser |
| SSB00130 | Extra charge for 130L/min Dispenser |
| SSM00010 | Integrated Diesel Genset inside an acoustic isolated cabinet |

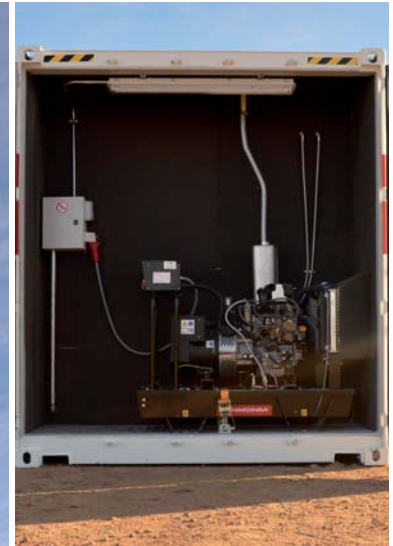

Specifications:

- Cabinet made from 1st trip ISO Container 20' or 40' High Cube. Equipped with Ventilation Grids, Roof's Access Cover to tank's manhole.
- Retention Tray and non-slip grating under dispenser area.
- Double Wall Tank, fully tested and certified according EN 12285-2 Class A, with leak detector.
- Steel piping welded and tested.
- Suction Line 1.1/2" equipped with a mesh filter, anti-siphon valve and cut valve.
- Fuel Loading line 3", inlet near dispenser area, with CAMLOK connection, down pipe and overfill prevention valve.
- Venting: 2" vent pipe with atmospheric vent valve and filter.
- Level gauge, dipstick and capacity table.
- Dispenser TOKHEIM valid for retail.